



FT208P

Integrated Telephone and Intercom
Communication System

Features



- 2 external lines and 8 internal lines
- Multiple door stations with a maximum of 2 buttons
- Extensions can be partitioned between 2 door station call buttons and 2 trunk lines
- Each extension is individually programmed, features include call barring, call exclusion, relay activation etc.
- Up to 4 relays for door release, opening of driveway gates, security lights, switching on and off irrigation system etc.
- Direct inward system access (DISA) function allows external caller to dial preferred extensions.
- Room listening function e.g. baby monitoring
- Relays can be activated remotely by using the DISA function.
- Digital music on hold and external port for your preferred music on hold.
- Public Address Amplifier 600 Ohm output with pre-announcement tone accessible from all extensions.
- Optional surge protection devices (highly recommended)

Example System

A

Sela

Single Line Telephone with programmable memory

B

EX3100C

Farfisa Monitor. Use only for video and door release. Does not use FT208 ext. Use together with SLT for intercommunication

C


FT208P + ES65

Electronic PABX + Intercom Interface with Double Call and 4 relays

D

PL42PC

Video Intercom Modules for 2 Call

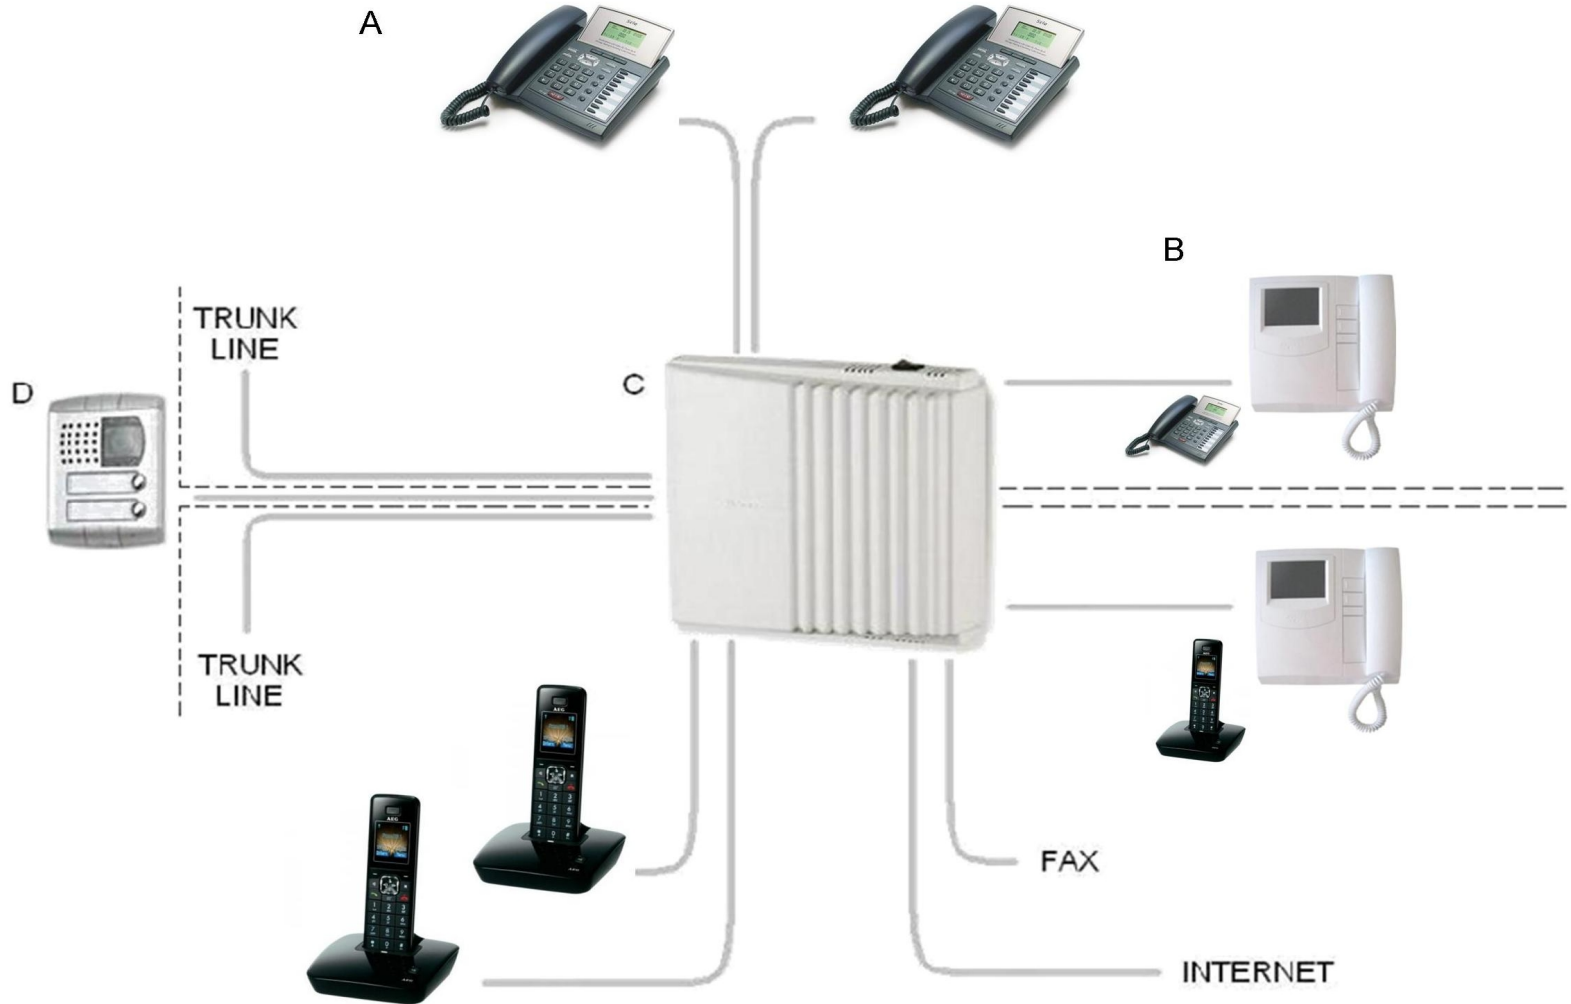

Specifications

Power supply	230VAC
Maximum power consumption	18W
power consumption in stand by	10W
Input protection fuse	0.315A
Maximum distance of extension (using 0.6mm² telephone pair)	350m
Weight	1.4Kg
Operating temperature	0°C - 40°C
Maximum humidity	85%RH
No. of external lines	2
No. of internal lines	8
No. of DTMF receivers	2
Simultaneous internal conversation	2
Simultaneous external conversation	2
Dimensions (mm)	225 x 254 x 66

Surge Protection

IMPORTANT INSTALLATION NOTE

IT IS ESSENTIAL THAT THE PROTECTION DEVICES BE CONNECTED TO A GOOD EARTH OF LESS THAN 20 OHMS

THE EARTH MUST BE A COPPER SPIKE OR COPPER WATER PIPES
DO NOT RELY ON THE MAINS EARTH

WARRANTY WILL BE NULL AND VOID IF THESE DEVICES ARE NOT CONNECTED TO A DECENT EARTH

