



*Imagine  
Zenithal Union*

## Video Door Phone system

- **Communication (Audio & Video)**  
- Communication with door phone camera and other intercoms at your home
- **Monitoring service**
- **Recording image of door phone camera (HAC-E72M only)**



HCC-500



HYUNDAI TELECOM

HAC-E71



HCC-600 Series



HEP-600 Series



### HAC-E71/HAC-E72M Video Door Phone

Power of use	AC 100~240V/50~60Hz
Installation	Surface Mount Type
Power Consumption	Max. 15W
Dimension	274(W) × 141(H) × 34(D)mm
Weight	Approx. 770g
Color	White

- Communication with door phone camera and other intercoms at your home
- Monitoring Service
- Recording 7 seconds image of door phone camera(HAC-E72M only)



**HAC-300**  
Door Phone Camera

Power Source	From Video Monitor, DC12V
Video Output	1Vp-p / 75Ω, composite(EIA/CCIR, NTSC/PAL)
Min. illumination	1Lux(Color), 0.1Lux(B/W)
Camera Angle	Up/Down, Left/Right Side Adjustable
Installation	Flush Mount Type
Operating Temperature	Temperature
Humidity	Within 90%(Relative Humidity)
Power Consumption	Max. 2W
Dimension	120(W) × 184(H) × 16(D)mm
Weight	Approx. 500g
Color	Black



**HAC-500**  
Door Phone Camera


Power Source	From Video Monitor, DC12V
Video Output	1Vp-p/ 5Ω, composite(EIA/CCIR, NTSC/PAL)
Min. illumination	1Lux(Color), 0.1Lux(B/W)
Camera Angle	Fixed
Installation	Flush Mount Type
Operating Temperature	-10°C ~ 50°C
Humidity	Within 90%(Relative Humidity)
Power Consumption	Max. 2W
Dimension	91.5(W) × 132.5(H) × 18(D)mm
Weight	Approx. 200g
Color	Black



**HAC-701**  
Door Phone Camera

Power Source	From Video Monitor, DC12V
Video Output	1Vp-p/75Ω, composite(EIA/CCIR, NTSC/PAL)
Min. illumination	1Lux(Color), 0.1Lux(B/W)
Camera Angle	Up/Down, Left/Right Side Adjustable
Installation	Flush Mount Type
Operating Temperature	-10°C ~ 50°C
Humidity	Within 90%(Relative Humidity)
Power Consumption	Max. 2W
Dimension	110(W) × 152(H) × 45(D)mm
Weight	Approx. 250g
Color	Silver

## System Configuration

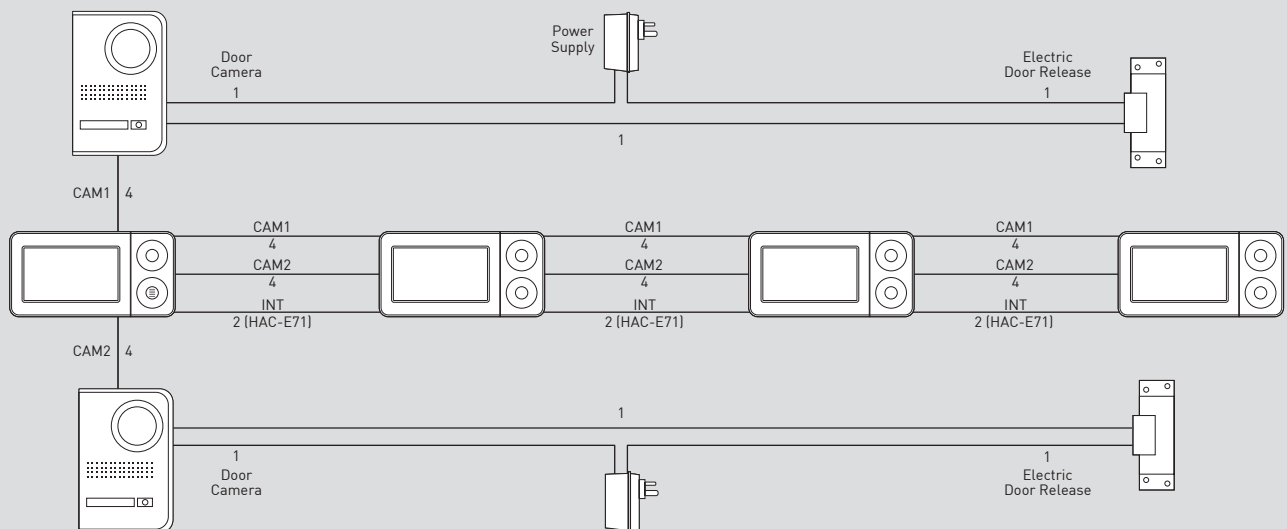



**HCC-600 Series**  
Multi Door Camera



**HEP-600 Series**  
Multi Door Camera

**Function**

- High definition 1/3" Color & B/W CCD Camera
- Main panel covers up to Max. 8 residents  
- 24 residents expander panel compatible (Max. 32 residents)
- Aluminum cover
- Flush mount
- Minimum illumination : 1Lux(Color), 0.1Lux(B/W)
- 4 wires in polarity
- Angle adjustment : Up/Down, Right/Left

\* Optional surface box available

Power Source	Regulated DC 12V
Video Output	1Vp-p/75Ω, Composite(EIA/CCIR, NTSC/PAL)
Min. illumination	1Lux(Color), 0.1Lux(B/W)
Camera Angle	Up/Down, Right/Left Adjustable
Installation	Flush Mount Type
Humidity	Within 90%(Relative Humidity)
Power Consumption	Max. 2W
Dimension	123(W)×308(H)×18(D)mm
Weight	Approx. 1kg
Color	Silver

**System Configuration**

